


Pneumatic Elevators / Spiders

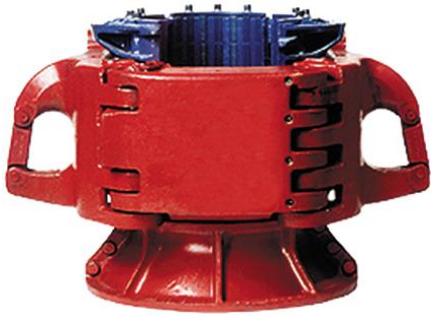

Pneumatic casing slip type elevator/spider available in 250T, 350T, 500T & 750T capacity. The products are designed and manufactured in accordance to API Spec 8C, PSL1/PSL2 specification for Hoisting Equipment.

Model	Slip range
250 Ton	2-3/8" - 7-5/8"
350 Ton	4-1/2" - 14"
500 Ton	4-1/2" - 14"

Model	Slip range
500 Ton	12-3/4" - 24-1/2"
750 Ton	4-1/2" - 14"
750 Ton	16" - 24-1/2"

Y Series Elevators



The Y Series slip type elevators are available in different models with slip assembly and tonnage to suit various pipe range. The products are designed and manufactured in accordance to API Spec 8C, PSL1/PSL2 specification for Hoisting Equipment.

Model	Slip Range	Load Rating (sTon)
LYT	3/4" - 2-1/16"	20
MYT	1" - 2-7/8"	40
YT	1" - 3-1/2"	75
HYT	2-3/8" - 3-1/2"	150

Model	Slip Range	Load Rating (sTon)
YC	3-1/2" - 7"	75
MYC	3-1/2" - 7"	125
HYC	2-7/8" - 7-5/8"	200

SLX Side Door Elevators



The SLX Side Door square shoulder elevators are available in different models and various tonnage capacity complete with safety pin. The products are designed and manufactured in accordance to API Spec 8C, PSL1/PSL2 specification for Hoisting Equipment.

Model	Pipe Range	Load Rating (sTon)
SLX-65	3-1/2" - 14-1/4"	65
SLX-100	2-3/8" - 5-3/4"	100
SLX-150	5-1/2" - 20"	150

Model	Pipe Range	Load Rating (sTon)
SLX-250	6-1/2" - 30"	250
SLX-350	6-5/8" - 14"	350

G Series Drill Pipe Elevators



The center latch G Series elevators are with 18 degree taper shoulder, available in different models with tonnage range from 100T to 500T capacity. The products are designed and manufactured in accordance to API Spec 8C, PSL1/PSL2 specification for Hoisting Equipment.

Model	Pipe Range	Load Rating (sTon)
MG	2-3/8" - 5"	100
RG	2-3/8" - 3-1/2"	150
MGG	3-1/2" - 5-1/2"	250

Model	Pipe Range	Load Rating (sTon)
GG*	3-1/2" - 5-7/8"	350
HGG	4" - 6-5/8"	500

* Modified to accommodate 5-7/8" OD Drill Pipe.

TA Collar Type Elevators



The TA Centre latch square shoulder elevators are available in different models and tonnage capacity to suit various range of pipe. The products are designed and manufactured in accordance to API Spec 8C, PSL1/PSL2 specification for Hoisting Equipment.

Model	Pipe Range	Load Rating (sTon)
TA 35	1" – 3-1/8"	35
TA 65	1-1/4" - 3-1/8"	65

Model	Pipe Range	Load Rating (sTon)
TA 100	2-3/8" - 5"	100
TA 150	4-1/2" – 11-1/4"	150

SJ Single Joint Elevators



The SJ center latch single joint elevators are mainly used for handling single casing or tubing. They are available in different pipe range from 2-3/8" OD to 36" OD with 5 Tons/6Tons capacity. The products are designed and manufactured in accordance to API Spec 8C, PSL1/PSL2 specification for Hoisting Equipment.

SP Single Joint Elevators



The SP center latch single joint slip type elevators are available for pipe range from 2-3/8" OD to 10-3/4" OD with slip assembly to handle 5 degree, 12 degree and 18 degree tapered pipes. The products are designed and manufactured in accordance to API Spec 8C, PSL1/PSL2 specification for Hoisting Equipment.